


## LEDAN Products Overview / Information

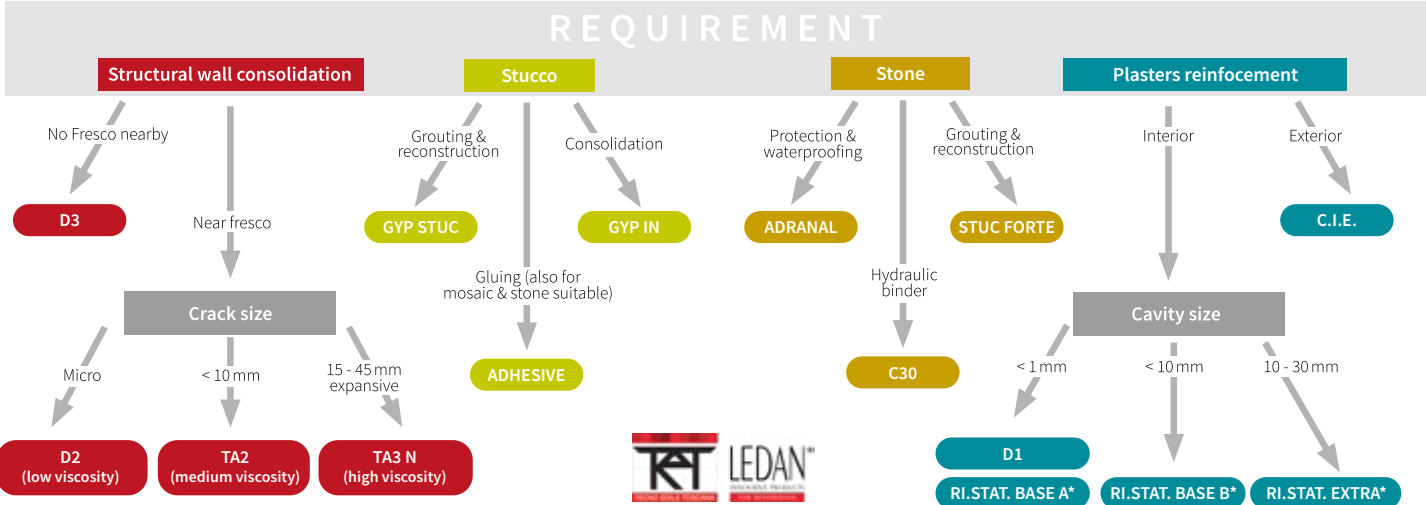

\* These three products can be mixed with each other.

		For inside and outside	Only for inside	Suitable near frescos	No fresco nearby	Expansive	Plasters detachments and cracks	Structural		Stone and hard materials		Gypsum stuccoworks	
								Filling of cracks	Grouting cracks	Protection	Grouting - reconstruction	Reinforcement injections	Reconstructions - molds decoration
D1	For plasters		●	●			Extrafluid						
RI.STAT. BASE A			●	●			Extrafluid						
RI.STAT. BASE B			●	●			< 10 mm						
RI.STAT. EXTRA			●	●		●	< 30 mm						
CIE	Structural	●			●								
D2		●		●			Extrafluid						
D3		●			●			●					
TA2		●		●			< 10 mm						
TA3N	●		●			< 45 mm							
STUC FORTE	Stone and hard materials	●		●				●		●			
C30		●		●				Hydraulic binder		Hydraulic binder			
ADRANAL		●		●				Protection	●				
ADHESIVE	Gypsum stuccoworks	●		●			For fragments				For fragments	●	Re-adhesion
GYP IN			●	●			(If made of gypsum)					●	
GYP STUC			●	●			For closing voids						●

**Some simple instructions for the correct use of the product:**

- Read the data sheet carefully and adhere to the intended use of the product.
- Never add other products, only water.
- Mix thoroughly with water using an electric equipment.
- Never use salt water or dirty water. For use in soluble-salts sensitive conditions, use demineralized water.

- Accurately measure the amount of water following the proportions stated in technical data sheet.
- Do not apply the product in extreme cold or extremely hot conditions (temperature below 5 °C or above 35 °C).

Questions? Should you have any query, do not hesitate to contact us.