
Daylight Rise-and-Fall Pendant LED-Luminaire

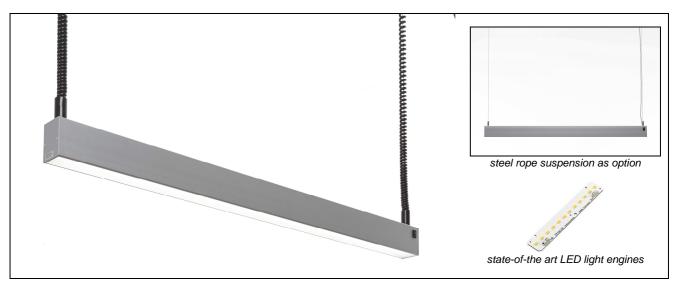

The ideal ceiling-mounted light for desk or workplace as well as general lighting

High light output, daylight-white colour temperature 5700K for excellent colour reproduction (CRI ~95)

Adjustable height ca. 50 - 150 cm steplessly by means of rise-and-fall pendants

Rigid, non adjustable thin steel rope mounting kit with transparent cable insulation available on request (not adjustable in height steplessly).

Product Description

- long-lasting, virtually maintenance-free lamp: LED lifetime up to 50,000 hours
- high energy-efficiency: state-of-the-art LED light-engines + extremely low loss integrated electronic LED driver
- no irritating separate power supply
- compact and strong housing made of self-supporting aluminium profile for perfect heat dissipation, natural anodized finish – smooth and easy to clean. Slim cross section of the luminaire body (WxH) 60 x 79 mm
- electrical connection with terminals in the right canopy
- integral ON/OFF-switch front right
- very good glare protection by means of a microprismatic lamp cover plus an additional diffuser foil behind (bifunctional for providing two different grades of diffusion)
- end caps oft he housing mades of steel, painting silver grey RAL 9006
- high-lustre anodized refelctors for high luminous efficacy

Technical Data

Article number:	5512035	All optical and electrical data +/	All optical and electrical data +/- 5% tolerance	
Dimensions of luminaire body	870 x 60 x 79 mm (LxWxH)	Colour temperature:	5700K	
Adjustable height:	approx. 50 – 150 cm	CRI:	>90 (typ. 95)	
Rated voltage:	220-240V, 0/5060Hz	Luminous flux of LEDs:	3400 lm	
Safety class:	1	Power consumption:	~ 42W	
Protection class:	IP 20	LED Power:	38W	

Illuminances at desk 100 x 60 cm (values in Lux)

